



INSTALLATION GUIDE


Bathtub spout with button attachment for hand shower with wall flange


Range:VIC



Requirements:-

- 1) **Pressure** :- 3 bar to 4 bar (Ideal Working Pressure)
- 2) **Pipe Lines** :- 1 lines for hot or cold inlet (1/2" BSPP)
- 3) **Installation** :- Wall Mounted.

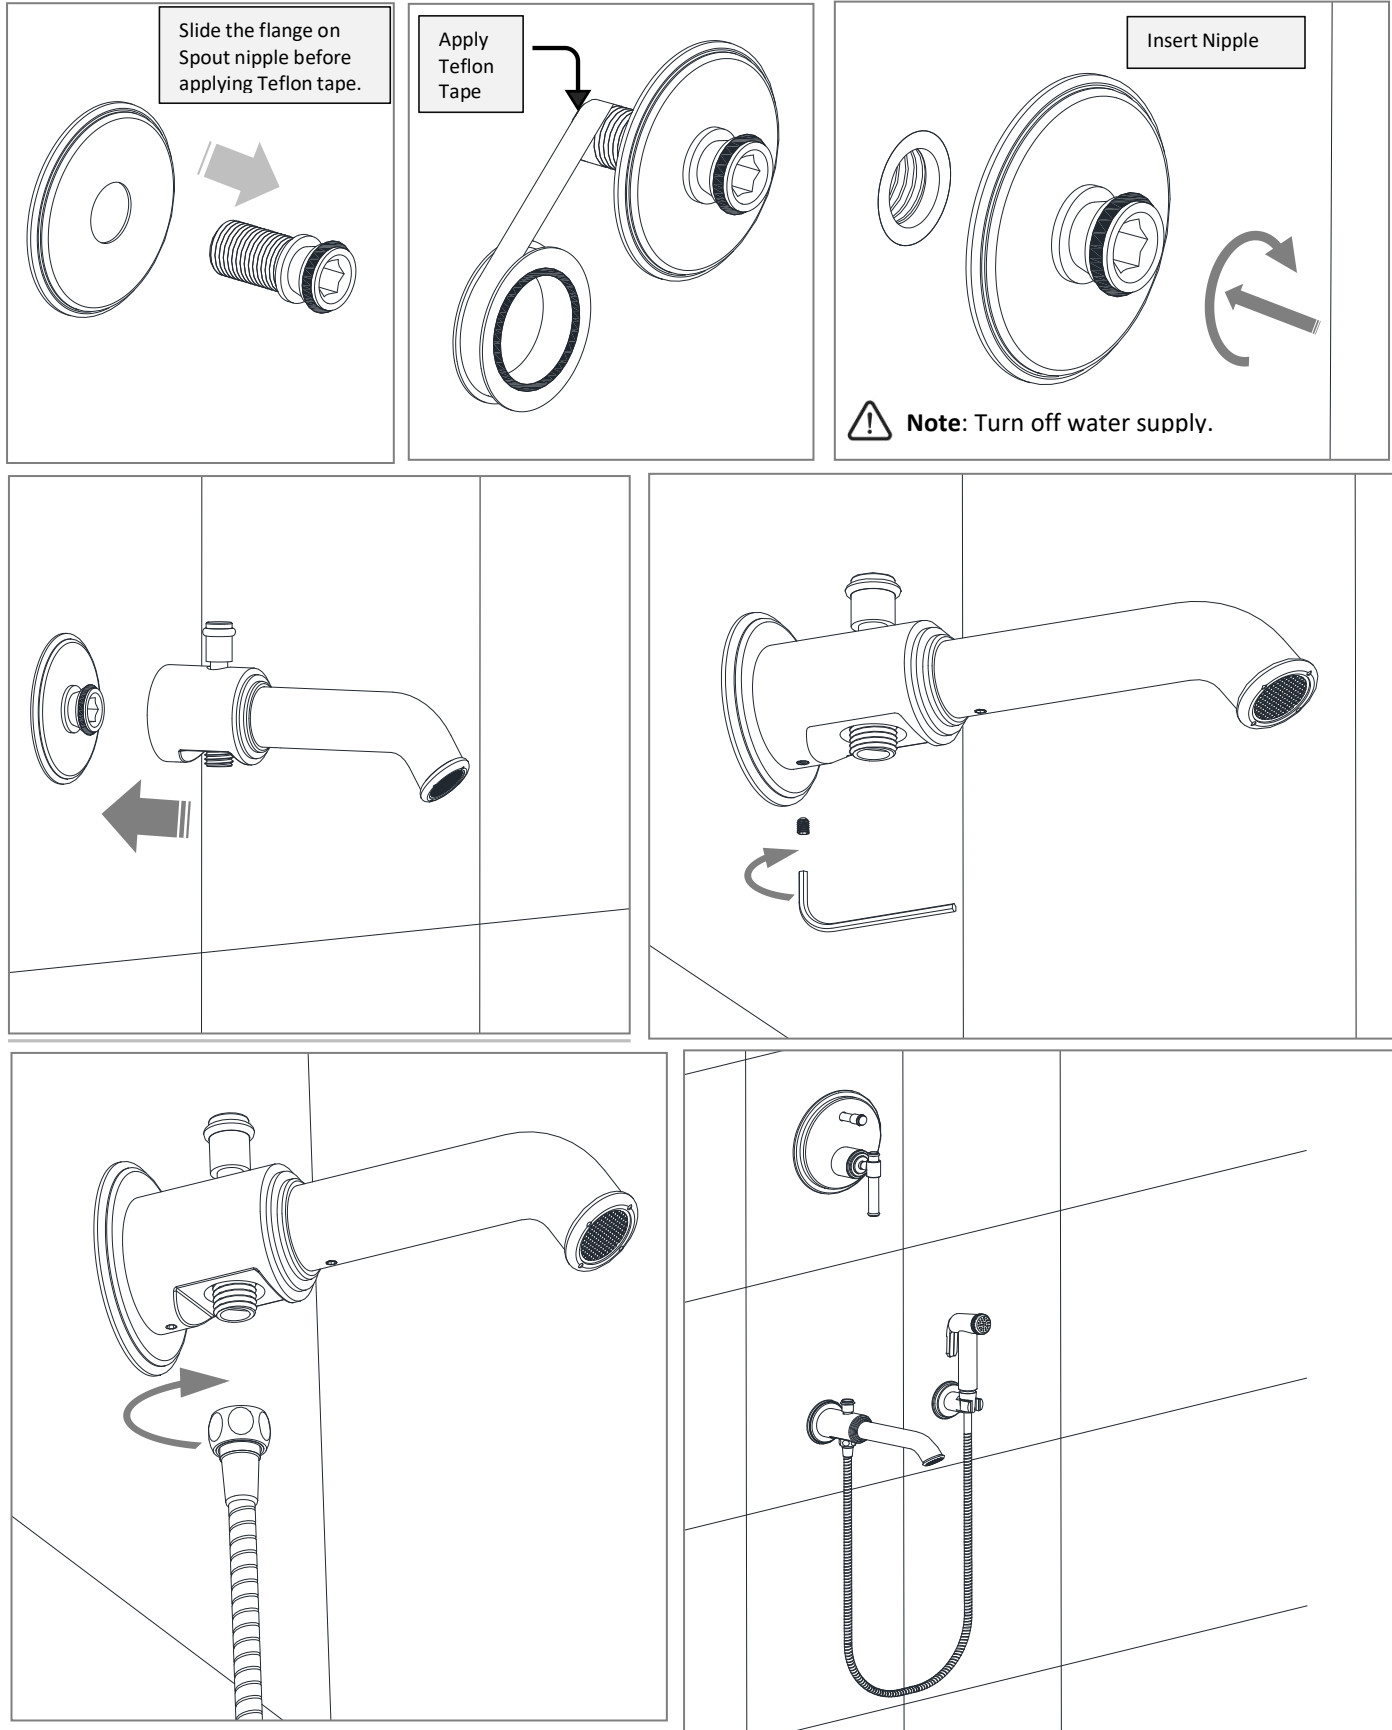

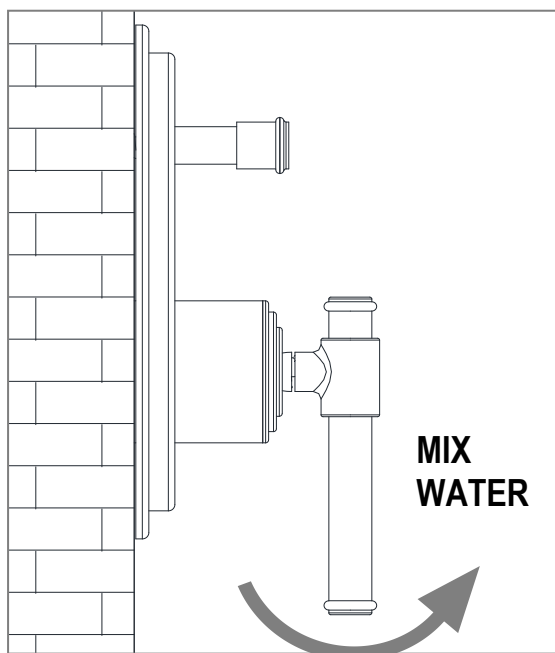

Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap. This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting. This ensures no water spots are left.

✗ Don'ts (Avoid These):


Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.


Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

**Recommended Cleaning:-
Twice in a Week.**

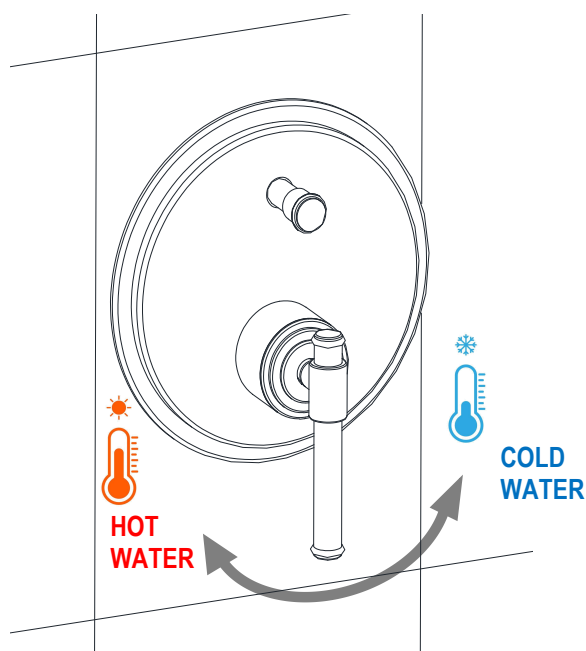

Pull lever upper side
when using Hand
shower

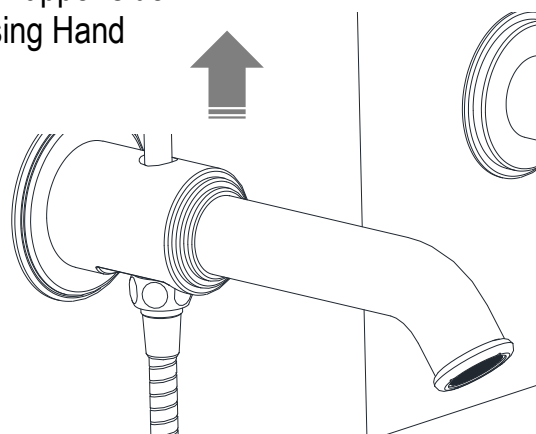

Troubleshooting

(A) Flow related

Problem	: - Reduced Water Flow.
Cause	: - Blocked/Clogged cartridges/aerators.
Remedy	: - Remove the aerators, cartridges clean it thoroughly.

(B) Leakage

Problem	: - Water Leakage
Cause	: - Damaged/Broken/Worn out O-rings, brass nuts not tightened
Remedy	: - Remove & Replace the defective O-rings. Or Tighten the brass nuts firmly

(C) Operation

Problem	: - Lever Hard To Operate
Cause	: - Clogged Cartridges (Silt, Dirt, Calcium Deposits etc.)
Remedy	: - Remove the cartridges clean it thoroughly with water/vinegar.