




INSTALLATION GUIDE


VIC-CHR-503433K_Exposed Part Kit of two concealed stop cocks Range:VIC

Requirements:-



- 1) **Pressure** :- 3 bar to 4 bar (Ideal Working Pressure)
- 2) **Pre-Installed:-** Concealed body (ALA-509433)
- 3) **Pipe Lines** :- 2 lines for hot & cold inlet (15 mm/ 1/2" BSPP)
(Hot & Cold water pressure to be balanced for optimum results.)
- 4) **Installation** :- Wall Mounted

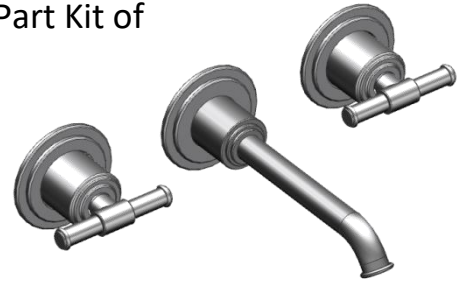


Make sure tile surface is finished B/W min & Max Marking's given on cover.

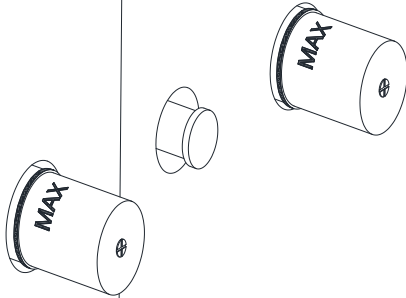



Take protective cover out.

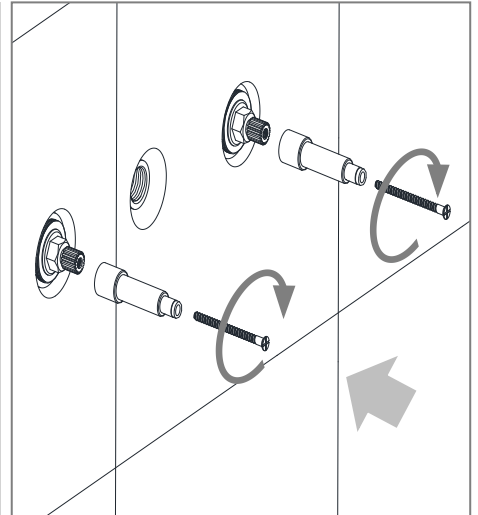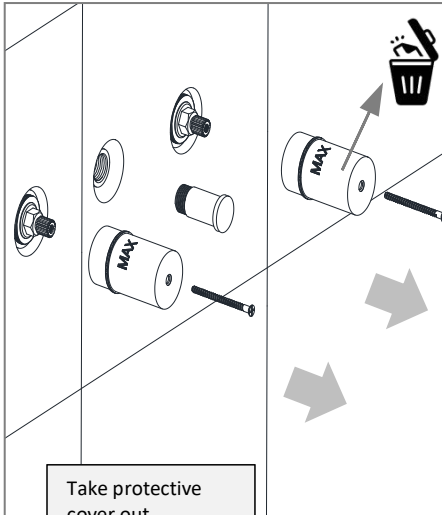



Add teflon tape before tighten Nipple

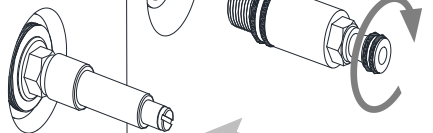


Note: make sure water is off.

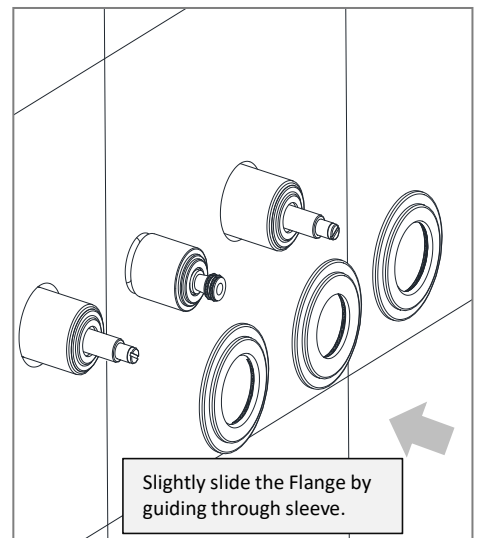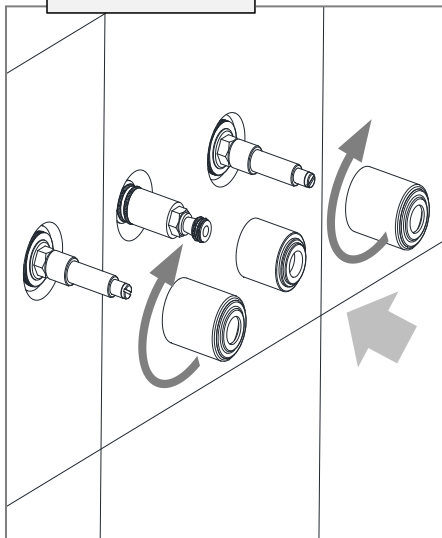


Slightly slide the Flange by guiding through sleeve.

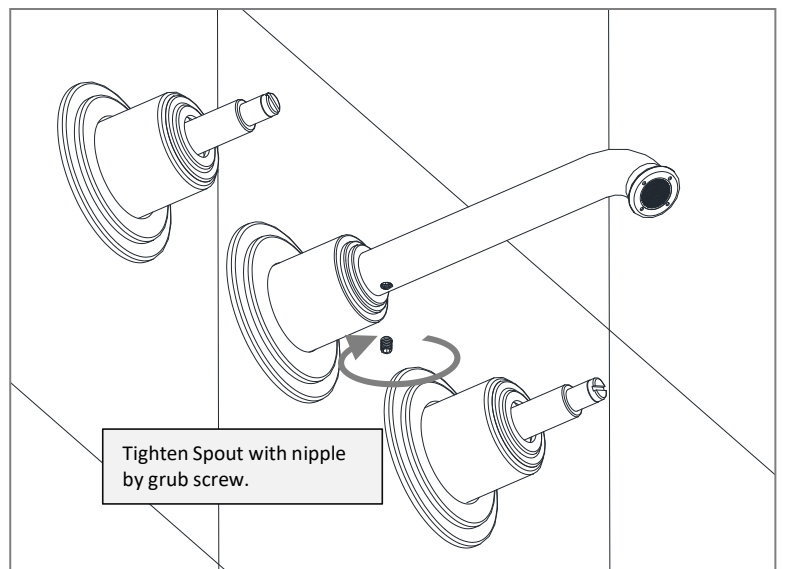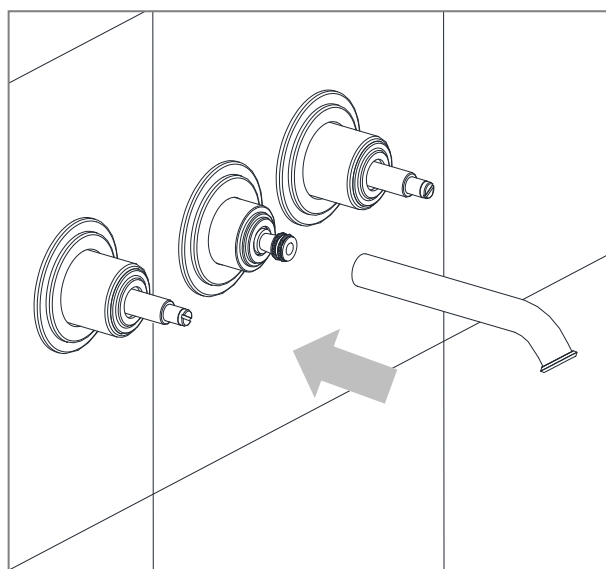

Tighten Spout with nipple by grub screw.

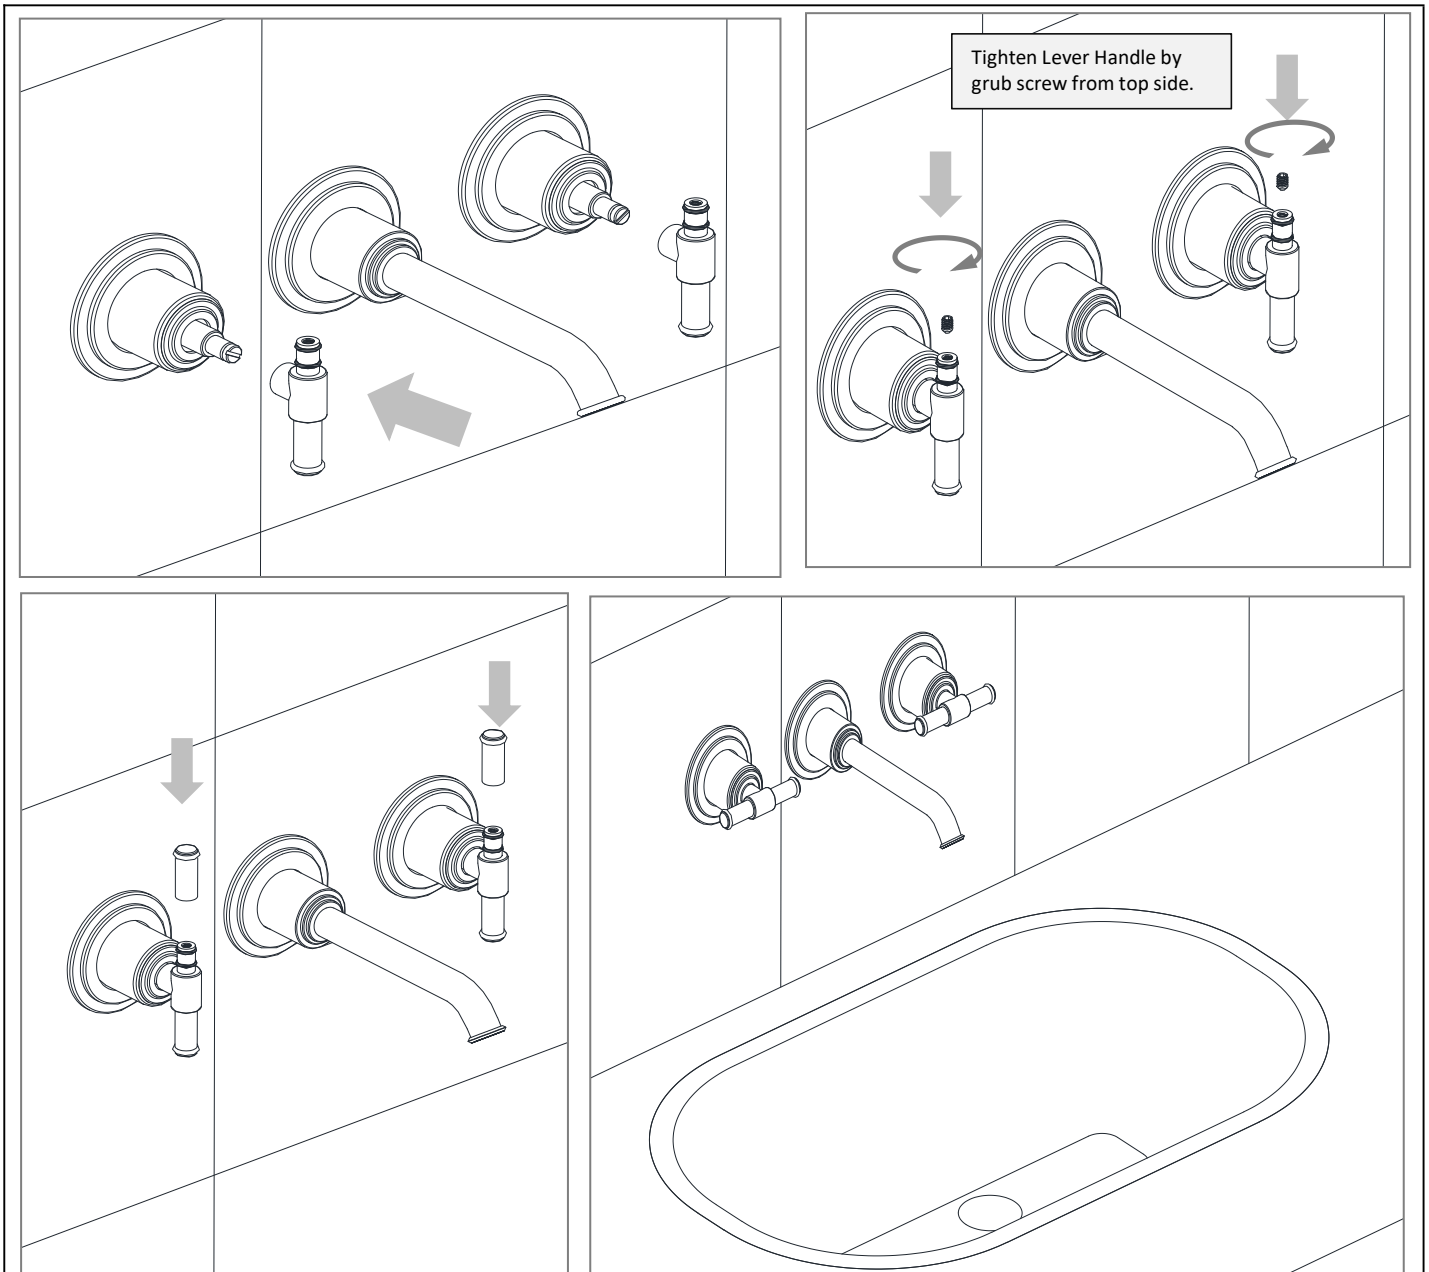

How to operate:

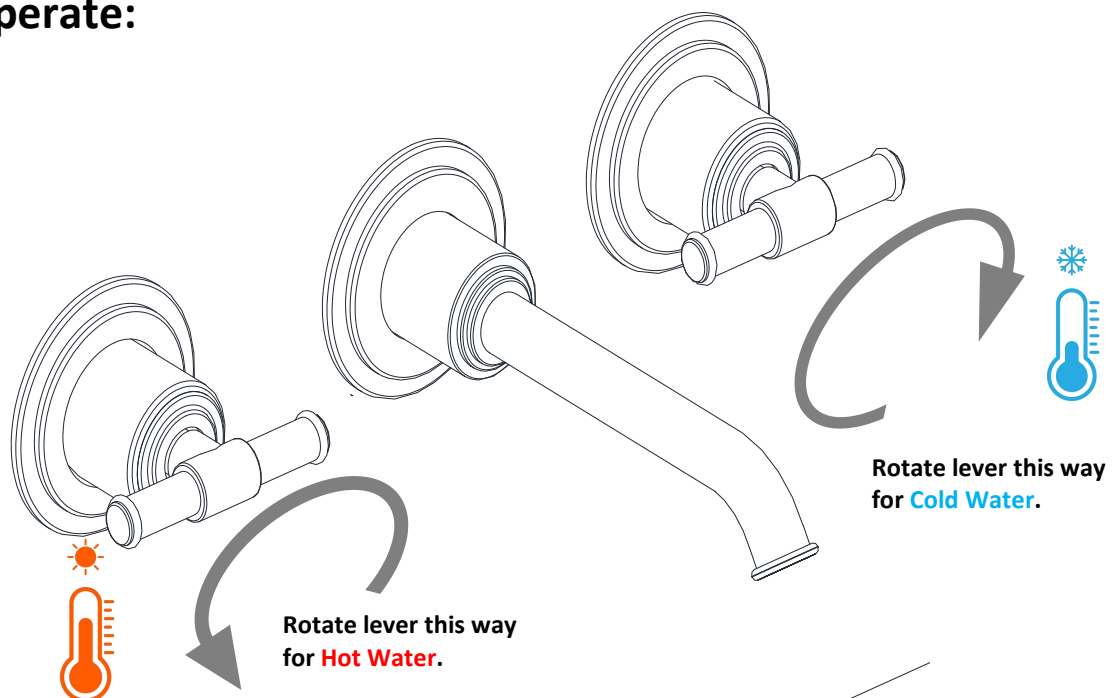



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap solution with a neutral pH (around 7).
Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap.

This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting.

This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

Safety Tips :-

- ❖ Make sure no loose fitting, Check for Leakage during water fittings.
- ❖ Keep water connection off during connection, avoid bending or twisted condition in pipes.
- ❖ Maintain desire water pressure to get conventional output.
- ❖ Don't use any metal/hard bristle scrub while cleaning .
- ❖ Don't push fittings forcefully, can lead to damage or crack.



**Recommended Cleaning:-
Twice in a Week.**

Troubleshooting

(A) Flow related

Problem	: -	Reduced Water Flow.
Cause	: -	Blocked/Clogged cartridges/aerators.
Remedy	: -	Remove the aerators, cartridges clean it thoroughly.

(B) Leakage

Problem	: -	Water Leakage
Cause	: -	Damaged/Broken/Worn out O-rings, brass nuts not tightened
Remedy	: -	Remove & Replace the defective O-rings. Or Tighten the brass nuts firmly

(C) Operation

Problem	: -	Lever Hard To Operate
Cause	: -	Clogged Cartridges (Silt, Dirt, Calcium Deposits etc.)
Remedy	: -	Remove the cartridges clean it thoroughly with water/vinegar.