



INSTALLATION GUIDE

Exposed part kit of thermostatic shower
mixer with 4-way diverter
Range:VIC













Requirements:-

Pre-installed :- Concealed body (VIC-503685C)

Installation: - In wall

**THIS INSTALLATION METHOD CAB ALSO
BE REFERRED FOR VIC--503687K**

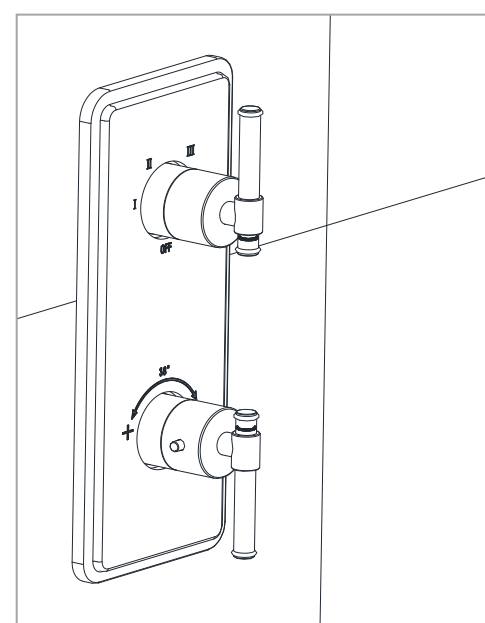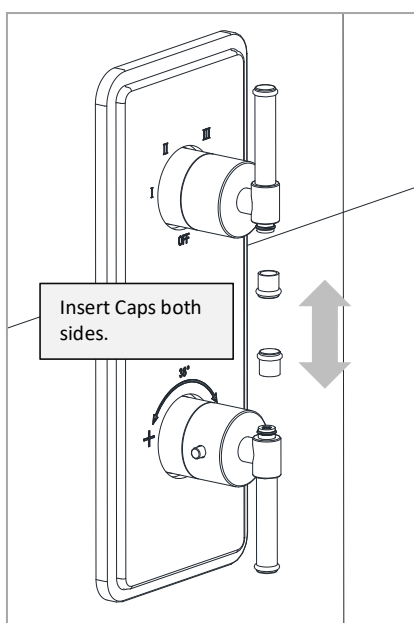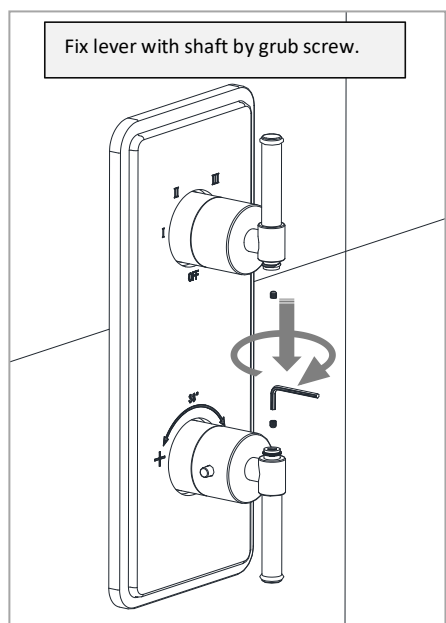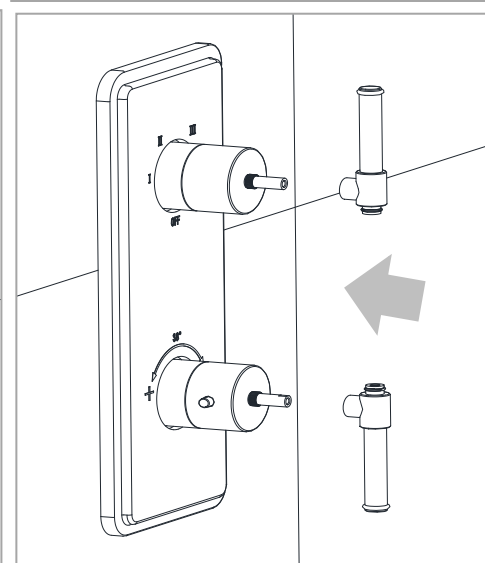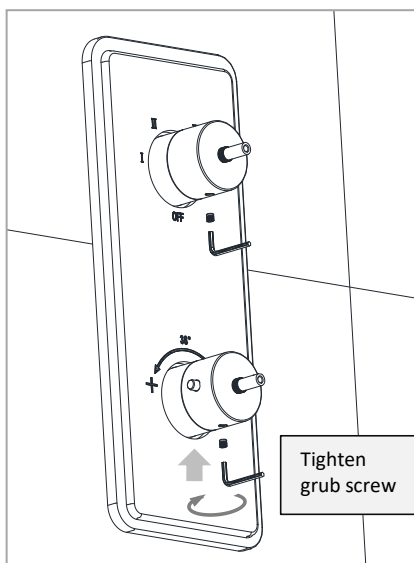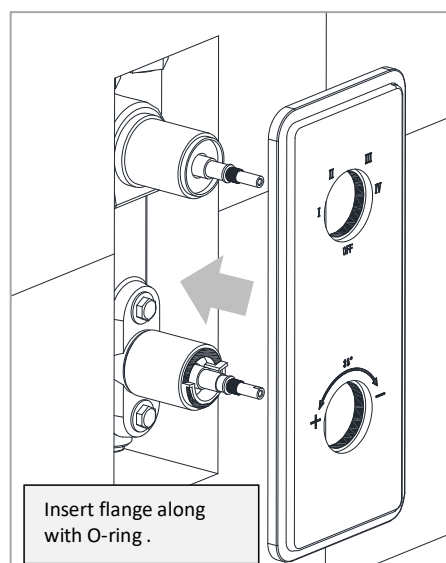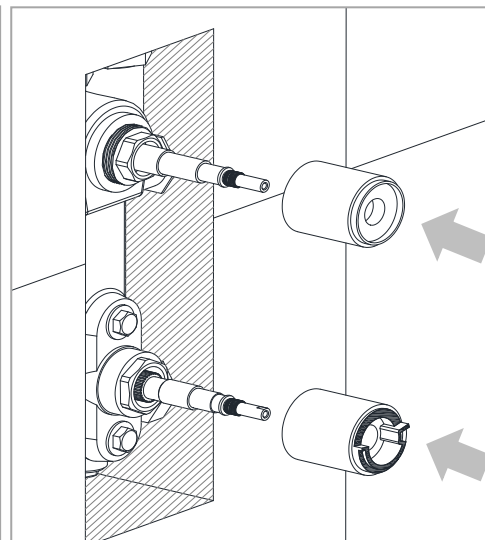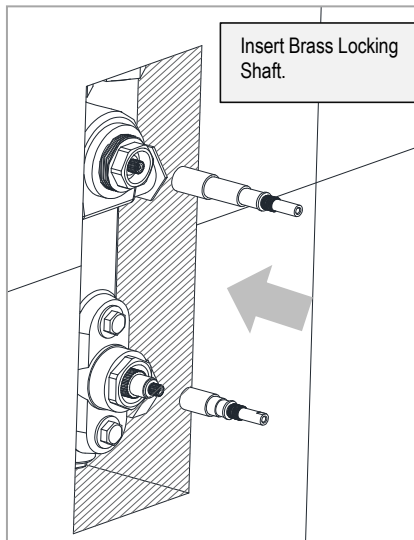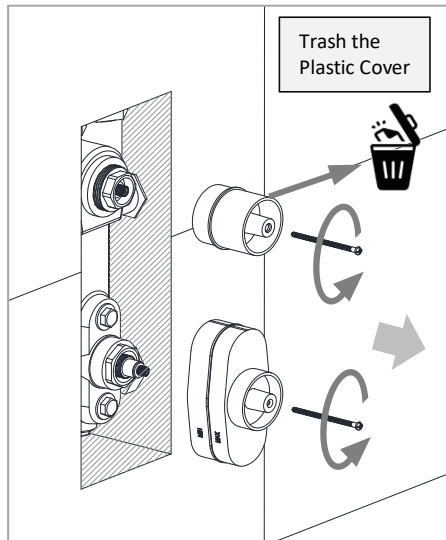


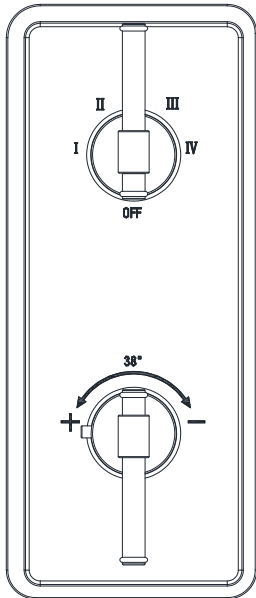

Operational knob for getting water into different outlets.

Water temperature adjuster knob.

Operate & Function :-

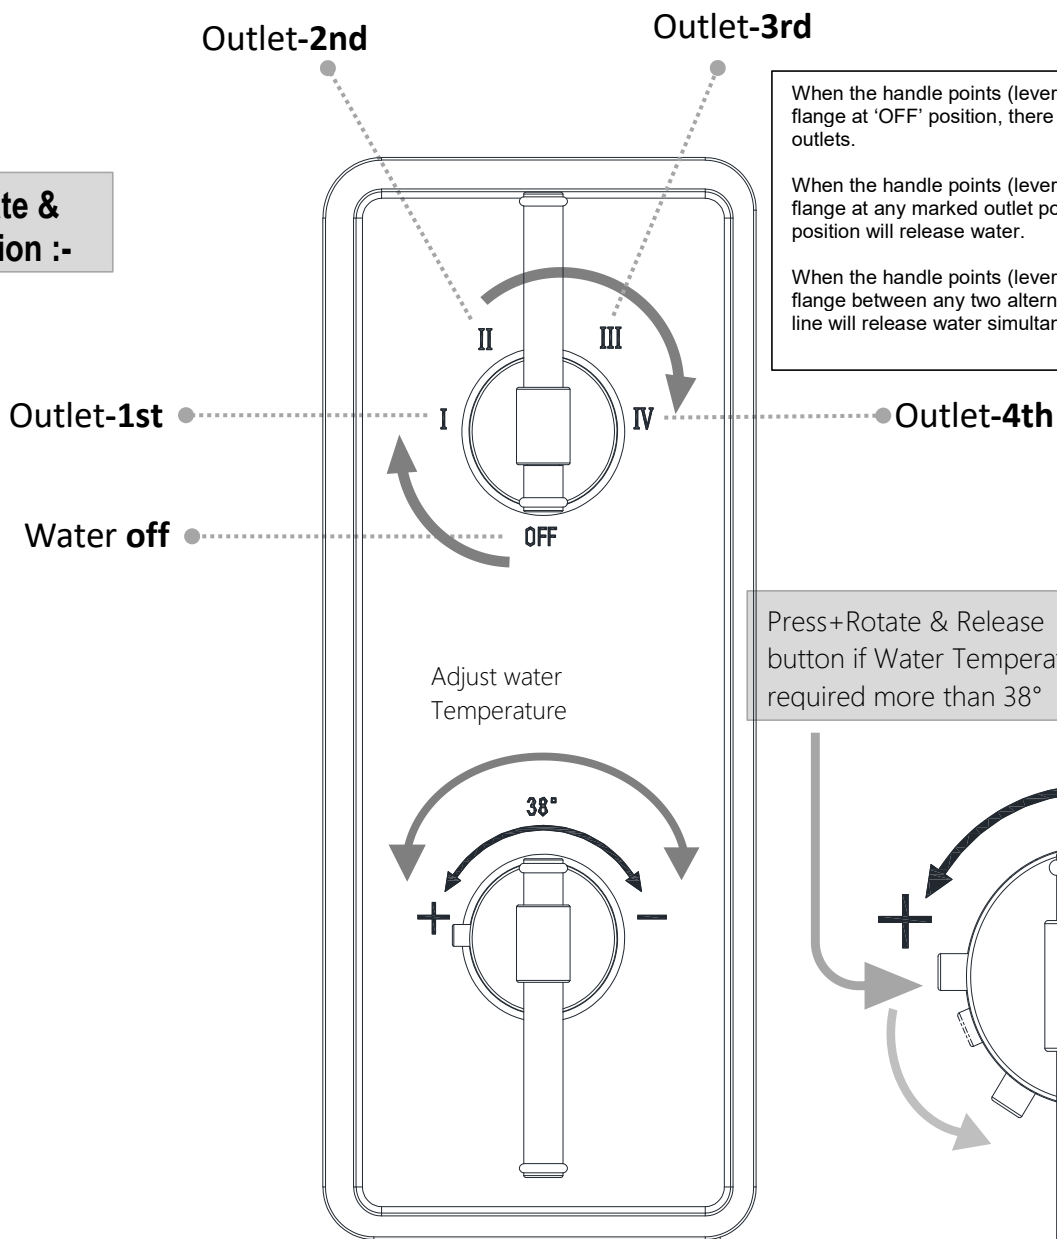

When the handle points (lever/marking) on the wall flange at 'OFF' position, there is no water supply from outlets.


When the handle points (lever/marking) on the wall flange at any marked outlet position, then only that position will release water.

When the handle points (lever/marking) on the wall flange between any two alternate positions then both line will release water simultaneously

Press+Rotate & Release button if Water Temperature required more than 38°

Safety Feature+Additional Temperature feature.

Safety feature: Standard/ default Water temperature will not exceed more that 38°

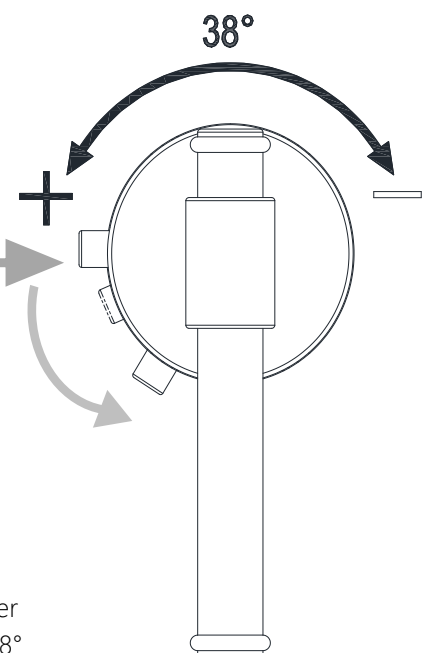



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap solution with a neutral pH (around 7).

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap.

This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting.

This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

Safety Tips :-

- ❖ Make sure no loose fitting, Check for Leakage during water fittings.
- ❖ Keep water connection off during connection, keep desire water pressure to get conventional output.
- ❖ Don't use to insert sealing O-rings & sealing washer wherever applicable.
- ❖ Don't use any metal/hard bristle scrub while cleaning .
- ❖ Don't push fittings forcefully, can lead to damage or crack.

Troubleshooting

(A) Flow related

Problem	: -	Reduced Water Flow.
Cause	: -	Blocked/Clogged cartridges/aerators.
Remedy	: -	Remove the aerators, cartridges clean it thoroughly.

(B) Leakage

Problem	: -	Water Leakage
Cause	: -	Damaged/Broken/Worn out O-rings, brass nuts not tightened
Remedy	: -	Remove & Replace the defective O-rings. Or Tighten the brass nuts firmly

(C) Operation

Problem	: -	Lever Hard To Operate
Cause	: -	Clogged Cartridges (Silt, Dirt, Calcium Deposits etc.)
Remedy	: -	Remove the cartridges clean it thoroughly with water/vinegar.



Recommended Cleaning:-
Twice in a Week.

THIS INSTALLATION METHOD CAB ALSO BE REFFERED FOR VIC--503687K